



Fail-safe

Automatic voltage regulator

with PWM precision

VRp model**22500-0338**

22.5 kVA
22.5 kW
230/400 volts
3 phase wye

30000-0338

30 kVA
30 kW
230/400 volts
3 phase wye

Precision PWM Automatic Voltage Regulator with Automatic Bypass

Precision fast-PWM ac mains voltage correction

TSi Power's VRp automatic precision regulator allows trouble-free operation of electronic equipment over a very wide mains ac voltage range of 160 to 300V found in many developing countries.

There is no switching of taps or otherwise a break in the power path thanks to continuous pulsed-width-modulation (PWM) switching of a buck-boost transformer.

Typical applications

Designed for applications where absolutely safe and precisely regulated ac power is required, such as mobile communications (GSM/satellite/wireless broadband), radio base stations (RBS)/base transmitter stations (BTS), radio/TV broadcasting, transmission sites for backhaul (including microwave links) industrial process controller (PLC), medical (mobile MRI, CT) and laboratory or analytical measurement equipment.

Key benefits

VRp is compatible with all loads as it does not switch any components in the power path. VRp's ultra-low impedance assures stability even with the most demanding loads. The automatic bypass assures that connected equipment will not shut down, even if VRp fails.

How the VRp Series works

The high frequency insulated gate bi-polar transistor (IGBT) driven converter takes the incoming ac power, measures against the nominal voltage and adds or subtracts voltage, 20,000 times per second, to achieve precisely regulated 230 vac output.

The automatic bypass will be activated when there is a fault condition. Green LEDs are used to indicate Normal (regulating mode) operation).



VRp-22500

Key features of the VRp Series precision voltage regulator

- Outstanding voltage regulation: under voltage input range of 172 to 276V (47 to 63Hz) per phase, output regulation will be: within +/- 1%.
- No switching of power path and unit always starts up on sine wave zero crossing.
- Over-under voltage cutoff, with automatic restart when mains voltage decreases back to below 275 vac, or above 160 vac.
- Failsafe: automatic bypass
- Low impedance
- Low weight
- Wall fixing kit is included
- Quiet operation
- Two year warranty



TSi Power Corporation
1103 West Pierce Ave
Antigo, WI 54409 USA
800 874 3160 (USA only)
Phone +1 715 623 0636
Fax +1 715 623 2426
sales@tsipower.com
www.tsipower.com
Copyright © 2007 TSi



Precision PWM automatic voltage regulator

Power with a Precision Attitude™




Lifting ears shown

TSi's ongoing product improvement process makes specifications subject to change. Other companies product names herein are for identification purposes only, and may be trademarks of their respective companies.

Specification	VRp-22500-0338	VRp-30000-0338
Electrical		
Capacity in VA (watts)	22.5kVA (22.5 kW)	30kVA (30kW)
Regulator engine	High frequency 20 kHz IGBT driven voltage regulation converter	
Input		
Nominal voltage	230/400 volts ac, three phase wye	
Normal operating voltage	Range: 160 to 300 volts ac	
Maximum operating range	160 to 300 volts ac (with reduced output capacity and wider regulation)	
Nominal frequency	47 to 63Hz	
Input circuit breaker and overcurrent protection	Input circuit breaker (with limited inrush current capability) and over-under voltage cutoff (at greater than 300 vac or less than 160 vac)	
Circuit breaker rating	3 x 40 amperes (ganged)	3 x 60 amperes (ganged)
Input wire size	10mm ² (AWG 8)	15mm ² (AWG 6)
Ac connection	Terminal block (L1, L2, L3, neutral and ground wires) provided.	
Output		
Nominal voltage	230/400 volts ac, three phase wye	
Power efficiency	Better than 96% (with 20-100% load conditions)	
Voltage regulation	Factory set at 1%, long-term stability: <2%.	
Relaxed voltage regulation	192 to 240 volts ac over wider input range of 160 to 300 volts ac	
Automatic bypass	Automatic bypass will be activated when there is a fault condition.	
System status indicator	Green LED (ON) indicates Normal (regulating mode) operation.	
Surge test conditions	Per Class 2 and Class 3 simulated lightning surge (Combination wave)	
Surge let-through voltages	Class 2 and 3, 4000V, 3000A: L-N: 200V, L-G: 200V Note: For maximum protection of the VRp and connected load equipment, TSi Power recommends that a matching isolation power conditioner (ILc) be placed adjacent to the VRp.	
Matching ILc (mandatory)	ILc-22500-0338	ILc-30000-0338
Ac connection	Terminal block (L1, L2, L3, neutral and ground wires) provided.	
Physical		
Dimensions	610mmW x 610mmH x 305mmD 24" wide x 24" high x 12" deep	610mm W x 863mm H x 305mm 24" wide x 34" high x 12" deep
Weight	89kg (196 lbs)	110kg (243 lbs)
Safety		
Standards	Designed to meet IEC 60950 standards. Protection class IP20.	
Environmental		
Ambient temperature	0° to +25°C (32° to +77°F). 10 to 90% RH non-condensing.	
Cooling method	Fan cooled.	
Warranty		
Warranty	Two year limited warranty, parts and labor.	

VRp system (per phase) architecture

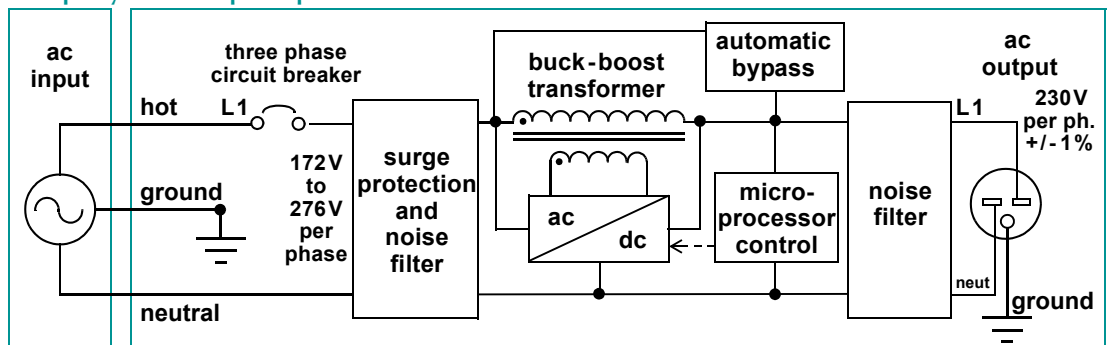

TSi Power Corporation
1103 West Pierce Ave
Antigo, WI 54409 USA
800 874 3160 (USA only)
Phone +1 715 623 0636
Fax +1 715 623 2426
sales@tsipower.com
www.tsipower.com
Copyright © 2007 TSi