

ILC

ILC Model*500-MED-8**500 W / VA**120 V, 60 Hz**4.2 A**750 MED-8**750 W / VA**120 V, 60 Hz**6.25 A**1000-MED-8**1000 W / VA**120 V, 60 Hz**8.3 A*

Medical line conditioners

TSI Power's ILC MED series of hospital-grade isolation transformers are tested and listed to UL 60601-1, 3rd Edition. ILC-MED units are designed specifically for North American power distribution systems and are only available in 120 V, 60 Hz versions. They comply with the National Electrical Code provisions for safety of separately derived systems unlike dual voltage 120/230 V units that compromise performance due to the conflicting requirements of 230 V, 50 Hz power systems. The ILC-MED products meet all requirements for leakage current as stipulated by IEC 60601-1, 3rd Edition. In addition, ILC-MED provides coordinated surge protection and filtering of fast-rise-time voltages. Unlike dual voltage units, ILC-MED has an optional neutral-to-ground bond to provide a path for fault current from a connected load without the need for a GFCI circuit breaker.

How ILC-MED works

ILC-MED consists of a low-inrush EI transformer that does not require



current limiting thermistors on the input. A two-pole filter and a metal oxide varistor provide coordinated surge protection which eliminates the need for additional surge protection. The isolation transformer reduces leakage current to levels below $100 \mu\text{A}$ for Normal Condition.

Features and Benefits

- Designed to IEC standards. No compromises necessary to also accommodate North American safety standards.
- Meets or exceeds 100 μA leakage current requirement for patient safety.
- Secondary neutral-to-ground bond provides path for fault current of connected equipment. No need to add GFCI circuit. Compliance with NEC.
- No embedded thermal devices in transformer. Less risk of failure.
- Thermal circuit breakers rather than inlets with fuses. No need to worry about replacing fuses.
- Designed for 120 V, 60 Hz only. No confusing setting input and output voltages.
- Low-inrush current EI transformer limits inrush current without the use of unreliable thermistors. Less risk of tripping upstream circuit breakers during power cycling.
- Coordinated surge protection and filtering eliminates need for inferior, external surge protectors. Improved system reliability decreases service calls.
- Eight outlets are standard. Provides maximum flexibility.
- IEC inlet and outlets are standard.

1103 W Pierce Avenue
Antigo, WI 54409 USA

Tel: +1-715-623-0636

Fax: +1-715-623-2426

Toll-Free: 1-800-874-3160

email: sales@tsipower.com


Web: www.tsipower.com

Specification	ILC-500-MED-8	ILC-750-MED-8	ILC-1000-MED-8
Input			
Nominal voltage & frequency	120 V, 57 - 63 Hz		
Operating voltage	120 V		
Max current	5 A	7 A	10 A
6 ft. 5-15 hospital grade cord set	Standard		
IEC C14 inlet	Option C		
Circuit breaker, thermal push-to-reset type	250 V, 50/60 Hz, 5A	250 V, 50/60 Hz, 7A	250 V, 50/60 Hz, 10 A
Ring Wave Surge Voltage Withstand Rating (Let Through Voltages) and Noise Rejection Isolation	Per ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @200 amps, 0.5 μs risetime,100kHz decay, Cat. B - 6000V @ 500 amps, 0.5 μs risetime, 100kHz decay applied at either normal or common mode at the input, the noise output voltage will be <10.0 V normal mode and <0.5 V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM- CM)		
Output			
Output power	500 W / VA	750 W / VA	1000 W / VA
Nominal voltage	120 V		
Max current	4.2 A	6.25 A	8.3 A
Power efficiency	94 to 96%		
Eight 5-15 R outlets	Standard		
Eight IEC C13 outlets	Option C		
Indicators and alarms			
Status indicators	Green LEDs front and back indicate unit is operational		
Physical			
Dimensions	Height: 5.5" / 139.7 mm Length: 9" / 228.6 mm Width: 7.5" / 190.5 mm		
Enclosure	Two-piece powder coated steel		
Weight lbs / kg	19 lbs / 8.63 kg	24 lbs / 10.9 kg	27 lbs / 12.26 kg
Mounting	To be placed on floor or flat surface		
Environmental			
Ambient temperature	32° to +104° F / 0° to +40° C		
Cooling method	Convection cooling		
Humidity	95% non-condensing		
Safety			
Leakage current	< 100 μA for Normal Condition / < 60 μA for Any Condition		
Standards	Power supply for use in health care facilities. Conforms to AAMI ES 60601-1. Certified to CSA C22.2 NO. 60601-1. Intertek/ETL Report No: 101470838MIN-002 original issued 17-Jul-2014.		
Warranty			
Warranty	Five-year limited warranty, parts and labor		



TSI Power's ongoing product improvement process makes specifications subject to change. Other companies product names herein are for identification purposes only and may be trademarks of their

ILC-500, 750, 1000-MED-8 system architecture

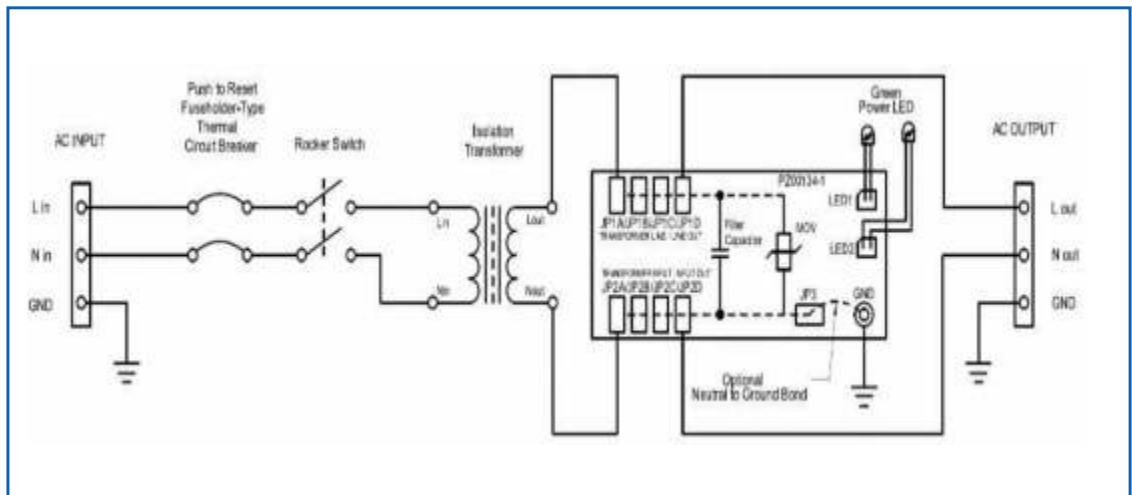

1103 W Pierce Avenue
 Antigo, WI 54409 USA
 Tel: +1-715-623-0636
 Fax: +1-715-623-2426
 Toll-Free: 1-800-874-3160
 email: sales@tsipower.com
 Web: www.tsipower.com